



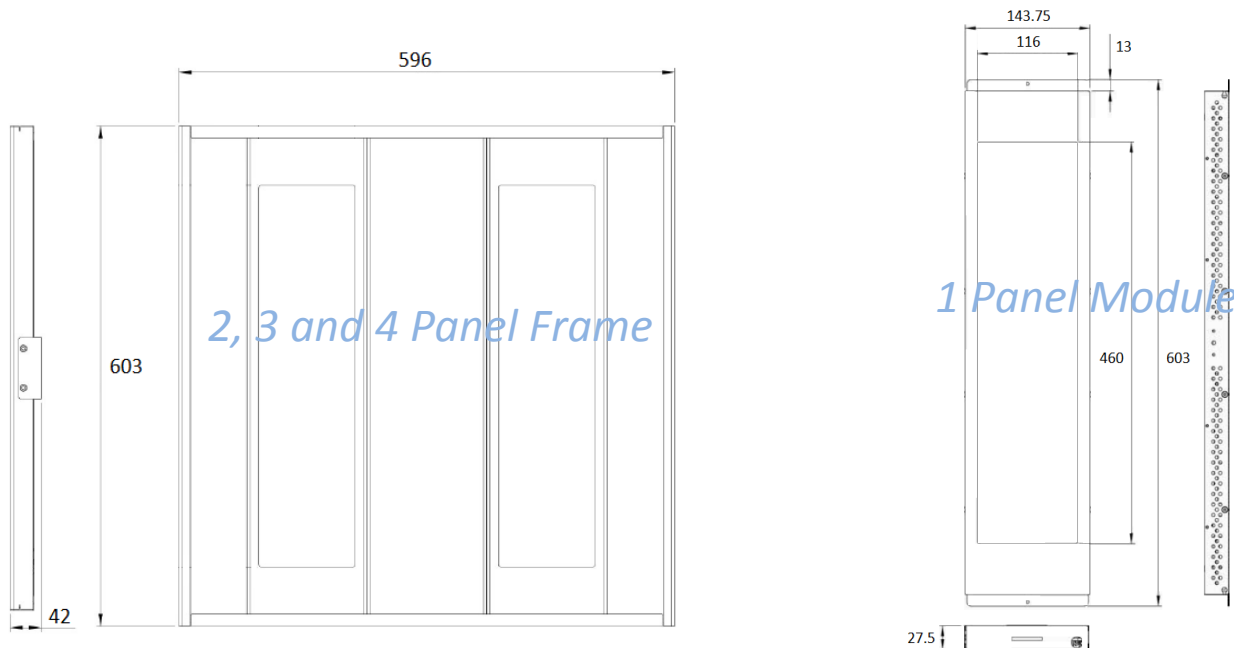


**Introduction:**

Lumimax's LED Panel Light is elegant, versatile, very low profile (only 42.7mm high) and with easy configurable design. It can be used as drop ceiling troffer light, directly mounted on the ceiling or hanging from the ceiling. Our standard 2'x2' Frame can be configured to use 2, 3 or 4 panels to meet your lighting requirement. To be more creative you can use the 1 panel module to design your Light Array to fit your application.

Model	Part Number	CCT	Lumen
1 Panel module *11 Watt 	LPL11CGPTFN1	5700K	950
	LPL11NGPTFN1	4500K	855
	LPL11WGPTFN1	2800K	770
2'x2' with 2 panel *22 Watt 	LPL22CGPTFN2	5700K	1,900
	LPL22NGPTFN2	4500K	1,710
	LPL22WGPTFN2	2800K	1,540
2'x2' with 3 Panel *33 Watt 	LPL33CGPTFN3	5700K	2,850
	LPL33NGPTFN3	4500K	2,565
	LPL33WGPTFN3	2800K	2,310
2'x2' with 4 Panel *44 Watt 	LPL44CGPTFN4	5700K	3,800
	LPL44NGPTFN4	4500K	3,420
	LPL44WGPTFN4	2800K	3,080

**Dimension (mm):**



Features:

- Energy Saving
- No UV or IR light radiation
- Low Profile LED Panel
- CRI >85 for warm white
- Low Power consumption
- Long Lifetime, 50,000 hours
- Easy installation.
- Replace Fluorescent Troffer Fixture
- No ballast, no starting & warm up time

Applications:



**Bank Lobby** (Bank Of Communication, Beijing)



**Airport** (Kaohsiung International Airport, Taiwan)



**Restaurant**



**Office, Lobby**



**Factory**



**Surgery Room**



**Nursery**



**Convenient Store**


**Specification:**

Model Number		1 Panel Module	2 Panel	3 Panel	4 Panel
Power Consumption		11W	22W	33W	44W
CCT		Available Option: 5700K / 4500K / 2800K			
Beam Angle		120°			
Light Source		LED Light Panel			
Socket/Connection		Terminal Block			
Shield / Cover		Acrylic, Frosted			
Dimmable		No			
Input Voltage		AC 90 ~ 280V (50/60Hz)			
Luminous Flux @CCT	5700K	950 lm	1,900 lm	2,850 lm	3,800 lm
	4500K	855 lm	1,710 lm	2,565 lm	3,420 lm
	2800K	770 lm	1,540 lm	2,310 lm	3,080 lm
CRI (@ CCT)		75% (5700K) / 80% (4500K) / 85% (2800K)			
Housing		Aluminum with Heated Paint			
Operation Temperature		-20° ~ +40°C			
Recommended Mounting Height		2.5 ~ 3 m			
Lifetime (L70)		50,000 hours			
Driver / Transformer		External DC 200V, 0.1A (per panel)			
Warranty		2 years			
Dimension		603x144x27.5mm	603 x 596 x 42 mm		
Total Weight		1.03 kg	3.093 kg	3.714 kg	4.28 kg

**Color Temperature:**



5700K



4500K



2800K